



PIPE BOLLARD DETAIL

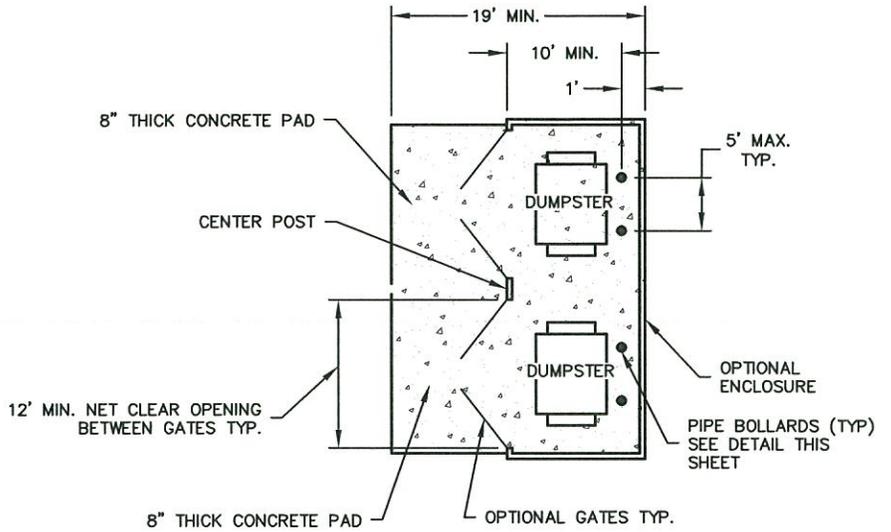

DOUBLE DUMPSTER ENCLOSURE

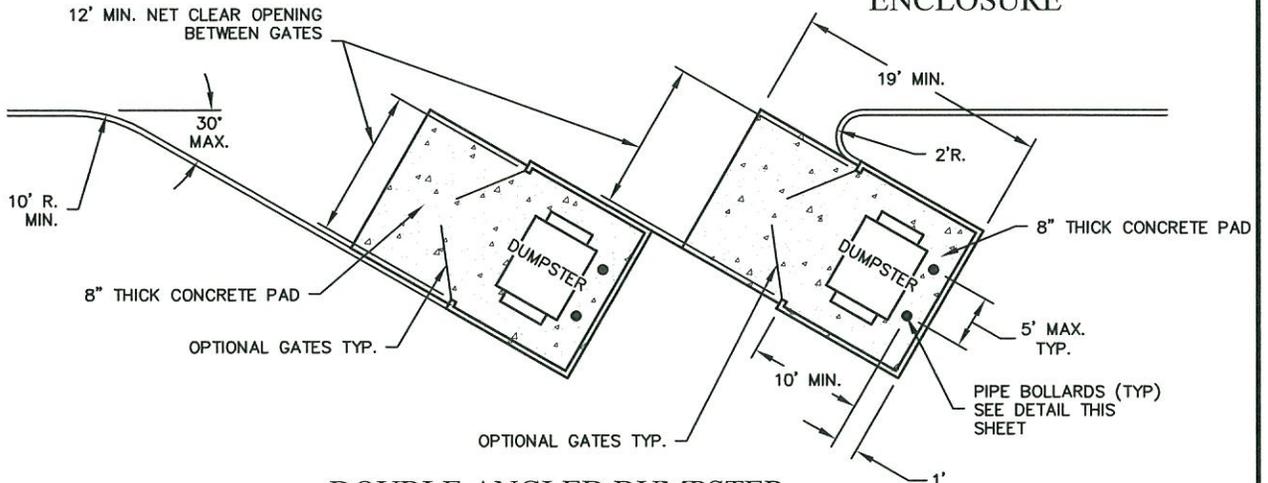

DOUBLE ANGLED DUMPSTER ENCLOSURE

GENERAL NOTES:

1. SOLID WASTE DUMPSTER ENCLOSURE IS OPTIONAL. IF THE OWNER DESIRES AN ENCLOSURE, THIS DETAIL SHALL SPECIFY THE REQUIREMENTS.
2. GATE(S) ARE NOT REQUIRED FOR ENCLOSURE. GATE(S) SHALL BE DESIGNED WITH A HOLD OPEN FEATURE. GATES SHALL OPEN TO GIVE A 12' MIN. CLEAR OPENING. GATES MUST BE ABLE TO OPEN 120°.
3. SANITATION DEPARTMENT WILL OPEN ENCLOSURES FOR COLLECTION PURPOSES BUT WILL NOT CLOSE ENCLOSURE UPON COMPLETION OF COLLECTION.
4. ENCLOSURE SHALL BE DEDICATED FOR DUMPSTER USE ONLY, NO STORAGE SHALL BE PERMITTED WITHIN ENCLOSURE WITHOUT PRIOR APPROVAL.
5. THERE SHALL BE A 30' MIN. STRAIGHT APPROACH TO ENCLOSURE.
6. 8" REINFORCED, CLASS "C" CONCRETE SLAB (#4 BARS @ 18" O.C.) SHALL BE PLACED UNDER AND 8' IN FRONT OF DUMPSTER PAD SITE OR ENCLOSURE.
7. THERE SHALL BE NO OVERHEAD WIRES ABOVE OR WITHIN 30' OF FRONT OF ENCLOSURE. NO OVERHEAD OBSTRUCTIONS SHALL BE WITHIN THE AREA NEAR THE ENCLOSURE THAT MIGHT INHIBIT TRASH PICKUP.
8. FAILURE TO FOLLOW THESE SPECIFICATIONS MAY RESULT IN THE ENCLOSURE BEING UNUSABLE BY THE CITY SANITATION TRUCKS.
9. SEE DETAIL 7000 FOR SOLID WASTE VEHICLE ACCESS STANDARDS.
10. DUMPSTER PAD SITE SHALL HAVE MAXIMUM OF 2% SLOPE IN ANY DIRECTION.

DOUBLE SOLID WASTE DUMPSTER PAD / ENCLOSURES

NOT TO SCALE

DISCLAIMER: This standard is governed by the City of Wichita Falls Engineering Department. No warranty of any kind is made by the City of Wichita Falls for any purpose whatsoever. The City of Wichita Falls assumes no responsibility for the conversion of this standard to other formats for incorrect results or damages resulting from its use.

<p>APPROVED</p> <p>CITY ENGINEER</p>	<p>CITY OF WICHITA FALLS, TX ENGINEERING DIVISION</p> <p>JANUARY 2015</p>	<p>DOUBLE SOLID WASTE DUMPSTER PAD / ENCLOSURES</p> <p>DETAIL NO. 7020</p>
<p>12-16-14</p> <p>DATE</p>		